

DOMESTIC REPLACEMENT LAMPS



EVOLUTION IN LIGHT



Driven by the increasing demand for energy efficient lighting, Venture has, since the early 1980s been a pioneer of light source technology, firstly transforming the HID lighting market with the introduction of the revolutionary UNI-FORM arc tube in Metal Halide lamps and more recently taking advantage of the rapid developments in LED technology to bring you a world class range of LED Lighting products.

As a Venture Lighting customer, you're assured the very best technology combined with the very highest level of service. In short, everything you'd expect from a global leader in the lighting industry. Our dedicated Technical and Distribution Centre located in Castle Donington, Leicestershire offers full technical support on all our products.

We believe that the best LED lighting products should be complemented by the very best service and support. That's why we strive to offer our customers, large and small, a level of service unequalled in the industry. Our UK customer service team supported by our experienced technical department is always there to provide expert product advice and to help you with all your lighting systems requirements.



CE Conformity



3 Year Warranty (Subject to Term & Conditions)
*Refer to Website



Recommended Voltage



Colour Rendering



Energy Rating



Compliant with the current ErP Legislations

IC Solution - Compatible with IC Drivers.



WHY LED LIGHTING?

LONG SERVICE LIFE

LED lights have a longer lifetime compared to conventional lighting. LEDs can last 25-30 years longer, which eliminates the need for frequent replacement.



GLS - 1000 HRS



LED - 25000 HRS

LOW ENERGY CONSUMPTION

Replacing conventional lighting with LEDs saves up to 80% through reduced power consumption.

GLS LED

Energy efficiency comparison



Equivalent GLS LED



Traditional GLS

Wattage	12.5W	100W
Life	25,000 hours	1,000 hours
Average price	£29.95	£1.50
Energy consumption / year	36 kW	288 kW
Total costs / year	£7.01	£35.04

NOTE: Costs and savings calculated based upon typical domestic tariff of 12p per unit (kWh) and a single lamp on for eight hours per day.

ENVIRONMENTALLY FRIENDLY LIGHT SOURCE

LED lighting contains no toxic materials which pollute our environment and a LEDs Co2 emission rate is 1/7 of a Traditional GLS lamp.

ATHERMANCY and no IR or UV

LED lighting contains no toxic materials which pollute our environment and a LEDs Co2 emission rate is 1/7 of a Traditional GLS lamp.

PAR 16/GU10 - NON DIMMABLE



DOM001
DOM002
DOM003

DOM004
DOM005
DOM006

DOM007
DOM008
DOM009

Benefits


- Eco-friendly, perfect replacement for general lighting.
- Compatible with all luminaires, easy to install and operate.
- Extra long lifetime, reduces the hassle of frequent replacements.

Advantages

- Excellent optical design, consistency in color of light.
- Reliable IC solution, automatic production.
- S-shaped base, IEC standard size.

Applications

Market, Walkways, Hospital, Shops, Domestic.

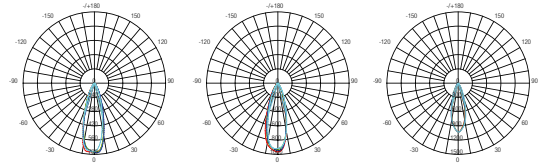

Model	Watt. (W)	Replace Watt.(W)	∅ 90° (mm)	CBCP (cd)	CCT (K)	CRI (Ra)	Power Factor	Lifespan (hrs)	Base	Max Dimension (mm)		Box Quantity
PAR16												
DOM001	3.6	35	250	660	3000	80	>0.5	25000	GU10	50	54	100
DOM002	3.6	35	255	680	4000	80	>0.5	25000	GU10	50	54	100
DOM003	3.6	35	260	680	6500	80	>0.5	25000	GU10	50	54	100
DOM004	5	50	350	840	3000	80	>0.5	25000	GU10	50	54	100
DOM005	5	50	370	860	4000	80	>0.5	25000	GU10	50	54	100
DOM006	5	53	370	860	6500	80	>0.5	25000	GU10	50	54	100
DOM007	5.8	60	425	960	3000	80	>0.5	25000	GU10	50	54	100
DOM008	5.8	60	430	980	4000	80	>0.5	25000	GU10	50	54	100
DOM009	5.8	60	440	980	6500	80	>0.5	25000	GU10	50	54	100

* SUBJECT TO TERMS & CONDITIONS



DOM010
DOM011
DOM012

DOM013
DOM014
DOM015

Benefits


- Ideal replacement for traditional halogen lamp.
- Attractive appearance, featuring a retro design.
- Extra long lifetime.

Advantages

- Professional lens design, perfect quality of light.
- Reliable IC solution.
- S-shaped base, IEC standard size.

Applications

Museum, Hospital, Shops, Exhibition, Domestic.

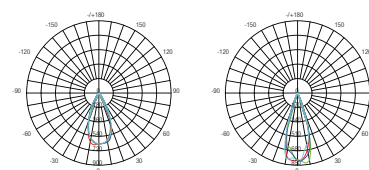

Model	Watt. (W)	Replace Watt.(W)	Φ 90° (lm)	CBCP (cd)	CCT (K)	CRI (Ra)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
PAR16												
DOM010	3.6	35	250	620	3000	80	>0.4	25000	GU10	50	54	100
DOM011	3.6	35	255	645	4000	80	>0.4	25000	GU10	50	54	100
DOM012	3.6	35	255	645	6500	80	>0.4	25000	GU10	50	54	100
DOM013	4.4	50	345	875	3000	80	>0.4	25000	GU10	50	54	100
DOM014	4.4	50	360	920	4000	80	>0.4	25000	GU10	50	54	100
DOM015	4.4	52	360	920	6500	80	>0.4	25000	GU10	50	54	100

* SUBJECT TO TERMS & CONDITIONS

MR16/GU5.3 - NON DIMMABLE



DOM016
DOM017



DOM018
DOM019



Benefits


- More Eco-Value.
- Broad transformer compatibility.
- Lower maintenance cost.

Advantages

- Reliable IC solution.
- Excellent optical design.

Applications

Walkways, Hospital, Shops, Domestic.

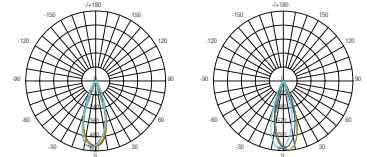

Model	Watt. (W)	Replace Watt. (W)	Ø 90° (mm)	CBCP (cd)	CCT (K)	CRI (Ra)	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
MR16 25000H CRI80											
DOM016	5	35	345	880	3000	80	25000	GU5.3	50	45	100
DOM017	5	36	360	920	4000	80	25000	GU5.3	50	45	100
DOM018	6	40	430	960	3000	80	25000	GU5.3	50	45	100
DOM019	6	40	430	980	4000	80	25000	GU5.3	50	45	100

* SUBJECT TO TERMS & CONDITIONS

PAR16/GU10 - DIMMABLE



DOM020
DOM021
DOM022

DOM023
DOM024
DOM025

DOM026
DOM027
DOM028

Benefits


- Better dimming performance, flicker free during dimming.

Advantages

- Wider dimming range (from 5% to 100%).
- Designed with global IC makers, brings an excellent dimming experience.

Applications

Walkways, Hospital, Shops, Domestic.

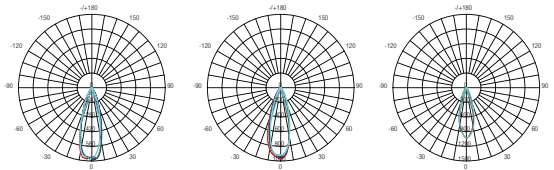

Model	Watt. (W)	Replace Watt.(W)	Φ 90° (lm)	CBCP (cd)	CCT (K)	CRI (Ra)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
PAR16 Dimmable												
DOM020	4	35	250	690	3000	80	>0.5	25000	GU10	50	54	100
DOM021	4	35	260	700	4000	80	>0.5	25000	GU10	50	54	100
DOM022	4	35	270	710	6500	80	>0.5	25000	GU10	50	54	100
DOM023	5	50	345	860	3000	80	>0.5	25000	GU10	50	54	100
DOM024	5	50	350	950	4000	80	>0.5	25000	GU10	50	54	100
DOM025	5	50	370	960	6500	80	>0.5	25000	GU10	50	54	100
DOM026	6	60	440	950	3000	80	>0.5	25000	GU10	50	54	100
DOM027	6	60	470	1030	4000	80	>0.5	25000	GU10	50	54	100
DOM028	6	60	480	1050	6500	80	>0.5	25000	GU10	50	54	100

* SUBJECT TO TERMS & CONDITIONS

PAR20/PAR30 TYPE - NON DIMMABLE





DOM032



DOM033

Benefits


- Perfect to replace traditional halogen PAR lamps.
- Much less energy consumed than halogen PAR lamps for the same lumen output.

Advantages

- A warm halogen-like accent beam, consistency in color of light.

Applications

Shop, Hotel, Gallery, Showcase, Museum, Exhibition hall etc.

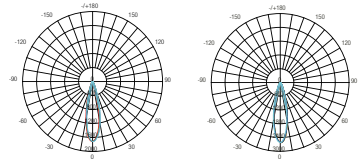

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	CRI (Ra)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
DOM032	6.8	50	500	3000	80	> 0.5	25000	E27	63	90	40
DOM033	12	75	900	3000	80	> 0.5	25000	E27	95	90	20

* SUBJECT TO TERMS & CONDITIONS

R50/R63/R80 REFLECTOR TYPE - NON DIMMABLE





DOM029



DOM030



DOM031

Benefits


- Ideal replacement for traditional Reflector lamps.
- Extra long lifetime, reduces frequency of lamp replacement.

Advantages

- Reliable IC solution for driver.
- User-friendly and eco-friendly, more than 25000 hours life.

Applications

Shoo. Hotel. Gallery. Museum. Exhibition hall. Domestic.

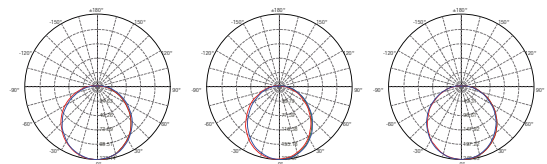

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	CRI (Ra)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
R Series											
DOM029	6	35	430	2700	80	>0.5	25000	E14	50	85	100
DOM030	9.5	45	600	2700	80	>0.5	25000	E27	63	103	100
DOM031	11	60	820	4000	80	>0.5	25000	E27	80	114	40

* SUBJECT TO TERMS & CONDITIONS

GLS TYPE (A SERIES) - NON DIMMABLE



DOM038
DOM040



DOM039
DOM041



DOM042
DOM044



DOM043
DOM045



DOM046
DOM048
DOM050
DOM052



DOM047
DOM049
DOM051
DOM053

Benefits


- Even Light Distribution.
- Extra long lifetime, reduces the hassle of frequent replacements.

Advantages

- Wider beam angle in an ideal lamp shape.

Applications

General illumination, Indoor illumination.

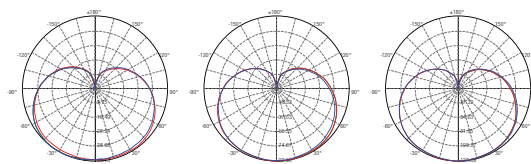

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	CRI (Ra)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
GLS											
DOM038	5.6	40	470	2700	80	>0.5	25000	E27	60	110	100
DOM039	5.6	40	470	2700	80	>0.5	25000	B22	60	109	100
DOM040	5.6	40	500	5000	80	>0.5	25000	E27	60	110	100
DOM041	5.6	40	500	5000	80	>0.5	25000	B22	60	109	100
DOM042	9.2	60	806	2700	80	>0.5	25000	E27	60	110	100
DOM043	9.2	60	806	2700	80	>0.5	25000	B22	60	109	100
DOM044	9.2	60	840	5000	80	>0.5	25000	E27	60	110	100
DOM045	9.2	60	840	5000	80	>0.5	25000	B22	60	109	100
DOM046	11.6	75	1060	2700	80	>0.5	25000	E27	60	109	100
DOM047	11.6	75	1060	2700	80	>0.5	25000	B22	60	109	100
DOM048	11.6	75	1150	5000	80	>0.5	25000	E27	60	110	100
DOM049	11.6	75	1150	5000	80	>0.5	25000	B22	60	109	100
DOM050	12.5	100	1521	2700	80	>0.5	25000	E27	60	117	100
DOM051	12.5	100	1521	2700	80	>0.5	25000	B22	60	116	100
DOM052	12.5	100	1600	5000	80	>0.5	25000	E27	60	117	100
DOM053	12.5	100	1600	5000	80	>0.5	25000	B22	60	116	100

* SUBJECT TO TERMS & CONDITIONS

GLS WITH DUSK TO DAWN SENSOR - NON DIMMABLE



DOM066
DOM068



DOM067
DOM069

Benefits


- Dusk to Dawn Sensor, ideal for exterior and security lighting.

Advantages

- High lumen output.
- High lm/W.

Applications

General outdoor illumination.

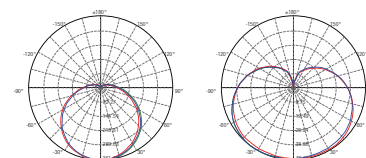

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	CRI (Ra)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
GLS WITH DUSK TO DAWN SENSOR											
DOM066	6.6	40	470	2700	80	>0.5	25000	E27	60	109	100
DOM067	6.6	40	470	2700	80	>0.5	25000	B22	60	108	100
DOM068	6.6	40	510	5000	80	>0.5	25000	E27	60	109	100
DOM069	6.6	40	510	5000	80	>0.5	25000	B22	60	108	100

* SUBJECT TO TERMS & CONDITIONS

GLS TYPE - (A SERIES) - DIMMABLE



DOM054
DOM056



DOM055
DOM057



DOM058
DOM060



DOM059
DOM061



DOM060
DOM062
DOM064



DOM061
DOM063
DOM065

Benefits


- Tested with major dimmers.
- Better dimming performance, flicker-free.

Advantages

- Designed with global IC makers, excellent dimming quality.

Applications

General illumination, Indoor illumination.

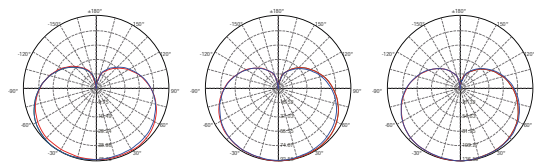

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	CRI (Ra)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Max Dimension Length (mm)	Box Quantity
GLS Dimmable											
DOM054	6.3	40	470	2700	80	>0.9	25000	E27	60	110	100
DOM055	6.3	40	470	2700	80	>0.9	25000	B22	60	109	100
DOM056	6.3	40	500	5000	80	>0.9	25000	E27	60	110	100
DOM057	6.3	40	500	5000	80	>0.9	25000	B22	60	109	100
DOM058	9	60	806	2700	80	>0.9	25000	E27	60	110	100
DOM059	9	60	806	2700	80	>0.9	25000	B22	60	109	100
DOM060	9	60	860	5000	80	>0.9	25000	E27	60	110	100
DOM061	9	60	860	5000	80	>0.9	25000	B22	60	109	100
DOM062	12	75	1060	2700	80	>0.9	25000	E27	60	117	100
DOM063	12	75	1060	2700	80	>0.9	25000	B22	60	116	100
DOM064	12	75	1150	5000	80	>0.9	25000	E27	60	117	100
DOM065	12	75	1150	5000	80	>0.9	25000	B22	60	116	100

* SUBJECT TO TERMS & CONDITIONS



FROSTED CANDLE TYPE - NON DIMMABLE





Benefits


- Up to 80% energy saving.
- Reliable quality.
- New IC driver and heat sink design.

Advantages

- New heat dissipation design with smaller size.

Applications

Desk lamp, Crystal Chandelier, Bedrooms, Restaurants, etc.

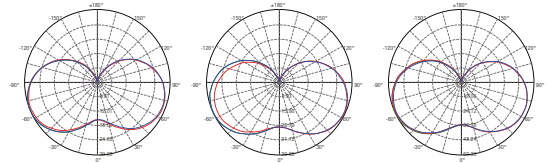

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
FROSTED CANDLE											
DOM070	3.4	25	250	2700	280°	>0.4	25000	E27	35	98	100
DOM071	3.4	25	250	2700	280°	>0.4	25000	B22	35	97	100
DOM072	3.4	25	250	2700	280°	>0.4	25000	E14	35	102	100
DOM073	3.4	25	250	2700	280°	>0.4	25000	B15	35	101	100
DOM074	3.4	27	270	5000	280°	>0.4	25000	E27	35	98	100
DOM075	3.4	27	270	5000	280°	>0.4	25000	B22	35	97	100
DOM076	3.4	27	270	5000	280°	>0.4	25000	E14	35	102	100
DOM077	3.4	27	270	5000	280°	>0.4	25000	B15	35	101	100
DOM078	5.9	40	470	2700	280°	>0.5	25000	E27	38	108	100
DOM079	5.9	40	470	2700	280°	>0.5	25000	B22	38	108	100
DOM080	5.9	40	470	2700	280°	>0.5	25000	E14	38	110	100
DOM081	5.9	40	470	2700	280°	>0.5	25000	B15	38	108	100
DOM082	5.9	40	490	5000	280°	>0.5	25000	E27	38	108	100
DOM083	5.9	40	490	5000	280°	>0.5	25000	B22	38	108	100
DOM084	5.9	40	490	5000	280°	>0.5	25000	E14	38	110	100
DOM085	5.9	40	490	5000	280°	>0.5	25000	B15	38	108	100

* SUBJECT TO TERMS & CONDITIONS

FROSTED CANDLE TYPE - DIMMABLE



Benefits


- Suitable for most dimmers, creates a warm ambience.
- High performance dimming, enjoy smooth, flicker-free dimming effect.
- Consistent light.

Advantages

- Excellent dimmer match.
- IC driver design.

Applications

Desk lamp, Chandelier, Bedrooms, Restaurants, Domestic, Hotels.

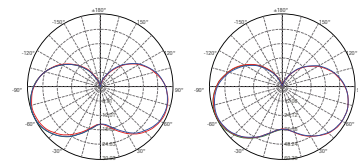

Model	Watt (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
FROSTED CANDLE Dimmable											
DOM086	3.5	25	250	2700	280°	>0.5	25000	E27	38	108	100
DOM087	3.5	25	250	2700	280°	>0.5	25000	B22	38	108	100
DOM088	3.5	25	250	2700	280°	>0.5	25000	E14	38	110	100
DOM089	3.5	25	250	2700	280°	>0.5	25000	B15	38	108	100
DOM090	3.5	25	270	5000	280°	>0.5	25000	E27	38	108	100
DOM091	3.5	25	270	5000	280°	>0.5	25000	B22	38	108	100
DOM092	3.5	25	270	5000	280°	>0.5	25000	E14	38	108	100
DOM093	3.5	25	270	5000	280°	>0.5	25000	B15	38	102	100
DOM094	6	40	470	2700	280°	>0.9	25000	E27	38	109	100
DOM095	6	40	470	2700	280°	>0.9	25000	B22	38	102	100
DOM096	6	40	470	2700	280°	>0.9	25000	E14	38	110	100
DOM097	6	40	470	2700	280°	>0.9	25000	B15	38	108	100
DOM098	6	40	500	5000	280°	>0.9	25000	E27	38	108	100
DOM099	6	40	500	5000	280°	>0.9	25000	B22	38	108	100
DOM100	6	40	500	5000	280°	>0.9	25000	E14	38	110	100
DOM101	6	40	500	5000	280°	>0.9	25000	B15	38	108	100

* SUBJECT TO TERMS & CONDITIONS

CLEAR CANDLE TYPE - DIMMABLE



DOM118
DOM122



DOM119
DOM123



DOM120
DOM124



DOM121
DOM125



DOM126
DOM130



DOM127
DOM131



DOM128
DOM132



DOM129
DOM133

Benefits


- Suitable for most dimmers, creates a warm ambience.
- High performance dimming, enjoy smooth, flicker-free dimming.
- Stable light quality.

Advantages

- Excellent dimmer match.
- IC driver design.

Applications

Desk lamp, Chandelier, Bedrooms, Restaurants, Domestic, Hotels.

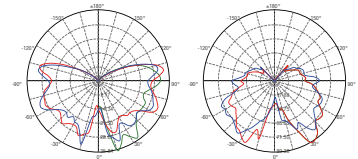

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
CLEAR CANDLE Dimmable											
DOM118	3.5	25	250	2700	230°	>0.5	25000	E27	38	108	100
DOM119	3.5	25	250	2700	230°	>0.5	25000	B22	38	108	100
DOM120	3.5	25	250	2700	230°	>0.5	25000	E14	38	110	100
DOM121	3.5	25	250	2700	230°	>0.5	25000	B15	38	108	100
DOM122	3.5	25	270	5000	230°	>0.5	25000	E27	38	108	100
DOM123	3.5	25	270	5000	230°	>0.5	25000	B22	38	108	100
DOM124	3.5	25	270	5000	230°	>0.5	25000	E14	38	110	100
DOM125	3.5	25	270	5000	230°	>0.5	25000	B15	38	108	100
DOM126	6	40	470	2700	230°	>0.9	25000	E27	38	109	100
DOM127	6	40	470	2700	230°	>0.9	25000	B22	38	108	100
DOM128	6	40	470	2700	230°	>0.9	25000	E14	38	110	100
DOM129	6	40	470	2700	230°	>0.9	25000	B15	38	108	100
DOM130	6	40	500	5000	230°	>0.9	25000	E27	38	109	100
DOM131	6	40	500	5000	230°	>0.9	25000	B22	38	108	100
DOM132	6	40	500	5000	230°	>0.9	25000	E14	38	110	100
DOM133	6	40	500	5000	230°	>0.9	25000	B15	38	108	100

* SUBJECT TO TERMS & CONDITIONS

CLEAR CANDLE TYPE - NON DIMMABLE



DOM102
DOM106

DOM103
DOM107

DOM104
DOM108

DOM105
DOM109

DOM110
DOM114

DOM111
DOM115

DOM112
DOM116

DOM113
DOM117

Benefits


- Up to 80% energy saving.
- High efficiency.
- Reliable quality.
- New IC driver and heat sink design.

Advantages

- New heat dissipation design with smaller size.

Applications

Desk lamp, Crystal chandelier, Bedrooms, Restaurants, Domestic, Hotels.

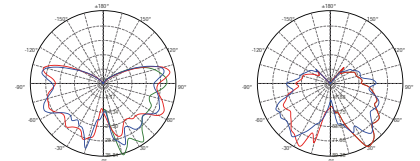

Model	Watt (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
CLEAR CANDLE											
DOM102	3.4	25	250	2700	240°	>0.4	25000	E27	35	98	100
DOM103	3.4	25	250	2700	240°	>0.4	25000	B22	35	98	100
DOM104	3.4	25	250	2700	240°	>0.4	25000	E14	35	102	100
DOM105	3.4	25	250	2700	240°	>0.4	25000	B15	35	101	100
DOM106	3.4	25	260	5000	240°	>0.4	25000	E27	35	98	100
DOM107	3.4	25	260	5000	240°	>0.4	25000	B22	35	98	100
DOM108	3.4	26	260	5000	240°	>0.4	25000	E14	35	102	100
DOM109	3.4	26	260	5000	240°	>0.4	25000	B15	35	101	100
DOM110	5.9	40	470	2700	240°	>0.5	25000	E27	38	109	100
DOM111	5.9	40	470	2700	240°	>0.5	25000	B22	38	109	100
DOM112	5.9	40	470	2700	240°	>0.5	25000	E14	38	108	100
DOM113	5.9	40	470	2700	230°	>0.5	25000	B15	38	110	100
DOM114	5.9	40	490	5000	230°	>0.5	25000	E27	38	108	100
DOM115	5.9	40	480	5000	230°	>0.5	25000	B22	38	108	100
DOM116	5.9	40	480	5000	230°	>0.5	25000	E14	38	110	100
DOM117	5.9	40	480	5000	230°	>0.5	25000	B15	38	108	100

* SUBJECT TO TERMS & CONDITIONS

GOLF BALL TYPE - NON DIMMABLE



DOM134
DOM137



DOM190
DOM191



DOM135
DOM138



DOM136
DOM139



DOM140
DOM143



DOM192
DOM193



DOM141
DOM144



DOM142
DOM145

Benefits


- Up to 80% energy saving.
- High efficiency.
- Reliable quality.
- New IC driver and heat sink design.

Advantages

- New heat dissipation design with smaller size.

Applications

Desk lamp, Bedrooms, Restaurants, Domestic, Hotels.

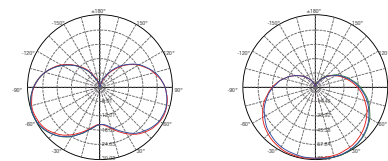

Max Dimension

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
GOLF BALL											
DOM134	3.4	25	250	2700	210°	>0.4	25000	E27	45	74	100
DOM135	3.4	25	250	2700	210°	>0.4	25000	E14	45	78	100
DOM136	3.4	25	250	2700	210°	>0.4	25000	B15	45	77	100
DOM137	3.4	25	280	5000	210°	>0.4	25000	E27	45	74	100
DOM138	3.4	25	280	5000	210°	>0.4	25000	E14	45	78	100
DOM139	3.4	25	280	5000	210°	>0.4	25000	B15	45	77	100
DOM140	5.9	40	470	2700	160°	>0.5	25000	E27	45	78	100
DOM141	5.9	40	470	2700	160°	>0.5	25000	E14	45	81	100
DOM142	5.9	40	470	2700	160°	>0.5	25000	B15	45	79	100
DOM143	5.9	40	490	5000	160°	>0.5	25000	E27	45	78	100
DOM144	5.9	40	490	5000	160°	>0.5	25000	E14	45	81	100
DOM145	5.9	40	490	5000	160°	>0.5	25000	B15	45	80	100
DOM190	3.4	25	250	2700	210°	>0.4	25000	B22	45	73	100
DOM191	3.4	28	280	5000	210°	>0.4	25000	B22	45	73	100
DOM192	5.9	40	470	2700	160°	>0.5	25000	B22	45	77	100
DOM193	5.9	40	490	5000	160°	>0.5	25000	B22	45	77	100

* SUBJECT TO TERMS & CONDITIONS

FROSTED GOLF BALL TYPE - DIMMABLE



DOM146
DOM147



DOM148
DOM149

Benefits


- Suitable for most dimmers, creates a warm ambience.
- High performance dimming, enjoy smooth, flicker-free dimming.
- Stable light quality.

Advantages

- Excellent dimmer match.
- IC driver design.

Applications

Desk lamp, Chandelier, Bedroom, Restaurant, Domestic, Hotels.

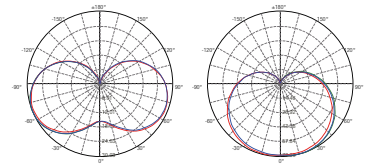

Model	Watt (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Lifespan (hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
FROSTED GOLF BALL Dimmable											
DOM146	3.6	25	250	2700	160°	>0.5	25000	E14	45	81	100
DOM147	3.5	25	270	5000	160°	>0.5	25000	E14	45	81	100
DOM148	6	40	470	2700	160°	>0.9	25000	E14	45	81	100
DOM149	6	40	500	5000	160°	>0.9	25000	E14	45	81	100

* SUBJECT TO TERMS & CONDITIONS

CLEAR GOLF BALL TYPE - DIMMABLE



DOM162
DOM163



DOM164
DOM165

Benefits


- Suitable for most dimmers, creates a warm ambience.
- High performance dimming, enjoy smooth, flicker-free dimming.
- Stable light quality.

Advantages

- Excellent dimmer match.
- IC driver design.

Applications

Chandelier, Bedroom, Restaurant, Domestic, Hotels.

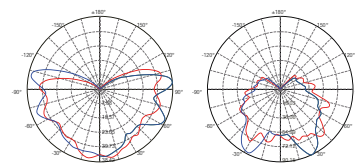

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Max Dimension Length (mm)	Box Quantity
CLEAR GOLF BALL Dimmable											
DOM162	3.5	25	250	2700	230°	>0.5	25000	E14	45	81	100
DOM163	3.5	25	270	5000	230°	>0.5	25000	E14	45	81	100
DOM164	6	40	470	2700	210°	>0.9	25000	E14	45	81	100
DOM165	6	40	500	5000	210°	>0.9	25000	E14	45	81	100

* SUBJECT TO TERMS & CONDITIONS

CLEAR GOLF BALL TYPE - NON DIMMABLE



DOM150
DOM153



DOM194
DOM195



DOM151
DOM154



DOM152
DOM155



DOM156
DOM159



DOM196
DOM197



DOM157
DOM160



DOM158
DOM161

Benefits


- Up to 80% energy saving.
- High efficiency.
- Reliable quality.
- New IC driver and heat sink design.

Advantages

- New heat dissipation design with smaller size.

Applications

Desk lamp, Bedrooms, Restaurants, Domestic, Hotels.

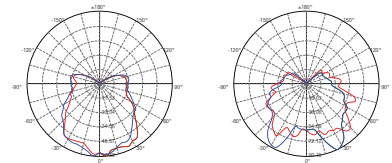

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
CLEAR GOLF BALL											
DOM150	3.4	25	250	2700	210°	>0.4	25000	E27	45	74	100
DOM151	3.4	25	250	2700	210°	>0.4	25000	E14	45	78	100
DOM152	3.4	25	250	2700	210°	>0.4	25000	B15	45	77	100
DOM153	3.4	27	280	5000	210°	>0.4	25000	E27	45	74	100
DOM154	3.4	27	270	5000	210°	>0.4	25000	E14	45	77	100
DOM155	3.4	27	270	5000	210°	>0.4	25000	B15	45	78	100
DOM156	5.9	40	470	2700	210°	>0.5	25000	E27	45	78	100
DOM157	5.9	40	470	2700	210°	>0.5	25000	E14	45	80	100
DOM158	5.9	40	470	2700	210°	>0.5	25000	B15	45	81	100
DOM159	5.9	40	490	5000	210°	>0.5	25000	E27	45	78	100
DOM160	5.9	40	490	5000	210°	>0.5	25000	E14	45	80	100
DOM161	5.9	40	490	5000	210°	>0.5	25000	B15	45	81	100
DOM194	3.4	25	250	2700	210°	>0.4	25000	B22	45	73	100
DOM195	3.4	27	270	5000	210°	>0.4	25000	B22	45	73	100
DOM196	5.9	40	470	2700	160°	>0.5	25000	B22	45	77	100
DOM197	5.9	40	490	5000	210°	>0.5	25000	B22	45	77	100

* SUBJECT TO TERMS & CONDITIONS

PYGMY TYPE - NON DIMMABLE



DOM166



DOM167

Benefits


- Integrated light source, gentle and soft light.

Advantages

- Streamlined appearance design.

Applications

Refrigerator, Mirror lamp.

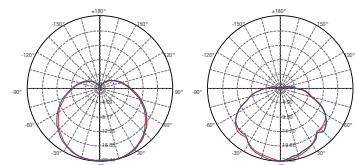

Model	Watt. (W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
PYGMY									
DOM166	1.6	110	2700	140°	15000	E14	27	58	100
DOM167	1.6	100	5000	140°	15000	E14	27	58	100

* SUBJECT TO TERMS & CONDITIONS

FILAMENT TYPE - NON DIMMABLE





DOM170



DOM171



DOM176



DOM184

Benefits


- Beautiful appearance and super light weight.
- New LED technology to ensure flicker-free light with stable colour rendering.

Advantages

- New design imitation of incandescent lamp.
- Beam angle $\geq 300^\circ$.

Applications

Crystal chandelier, Bedrooms, Restaurants, Outdoor Lanterns.

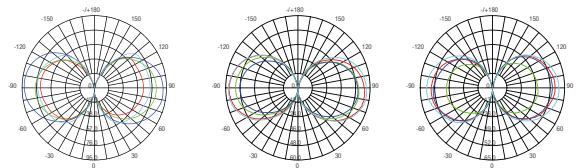

Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Lifespan (Hrs)	Base	Max Dimension Diameter (mm)	Max Dimension Length (mm)	Box Quantity
FILAMENT											
DOM170	6.2	60	806	2700	320°	>0.5	15000	E27	60	108	100
DOM171	6.2	60	806	2700	320°	>0.5	15000	B22	60	108	100
DOM176	4	40	450	2700	320°	>0.4	15000	E14	35	98	100
DOM184	4	40	450	2700	320°	>0.4	15000	E14	45	78	100

* SUBJECT TO TERMS & CONDITIONS

G4/G9 TYPE - NON DIMMABLE





DOM168



DOM169

Benefits


- Perfect replacement for halogen G4 and G9 low energy consumption.
- Long rated life up to 25,000 hours.

Advantages

- Compact size.
- Excellent thermal solution.

Applications

Wall sconce, task lighting and decorative applications, etc.



Model	Watt. (W)	Replace Watt.(W)	Initial Lumen (lm)	CCT (K)	Beam Angle (°)	Power Factor	Voltage (V)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
G4											
DOM168	1	10	80	2700	100°	>0.4	12	G4	13.8	41	100
G9											
DOM169	1.5	10	90	2700	140°	>0.4	240	G9	13.8	46	100

* SUBJECT TO TERMS & CONDITIONS

AR111 TYPE - NON DIMMABLE





DOM034
DOM036



DOM035
DOM037

Benefits


- Professional accent lighting, perfect light quality.

Advantages

- Reliable solution, special LED chip package to improve heat dissipation.

Applications

Directional Light Source, Galleries, Museums, Exhibition Rooms, Retail.

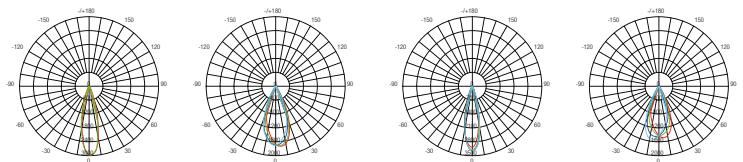

Model	Watt. (W)	Replace Watt.(W)	Φ90° (lm)	CBCR (cd)	CCT (K)	Beam Angle (°)	Power Factor	Volt. (V)	Base	Max Dimension Diameter (mm)	Length (mm)	Box Quantity
AR111												
DOM034	10.5	100	910	2400	4000	25°	>0.5	220-240	GU10	111	56	20
DOM035	11	100	850	2400	4000	25°	>0.5	12	G53	111	56	20
DOM036	10.5	100	900	1100	4000	40°	>0.5	220-240	GU10	111	56	20
DOM037	11	100	850	1100	4000	40°	>0.5	12	G53	111	56	20

* SUBJECT TO TERMS & CONDITIONS



Venture Lighting Europe Ltd
Trinity Court, Batchworth Island
Church Street, Rickmansworth
Hertfordshire WD3 1RT

T: 01923 692600
F: 01923 692659

www.venturelightingeurope.com